

J2 Fabric-Wrapped Dual Density Acoustic Panel

PRODUCT DATA AND SPECIFICATIONS

Made with a rigid fiberglass core, a 1/8" high-impact facing, and edge-hardened, these panels are wrapped with a variety of acoustic fabric colors and have tailored corners. They are ideal for spaces like conference rooms, auditoriums, meeting halls, or anywhere sound absorption is needed.

Composition

Resin-bonded borosilicate glass fiber, chemically-hardened edges

Thickness

7/8-inch, 1-inch, 2-inch, other custom thicknesses available

Density

6-7 PCF core, 14-16 PCF 1/8" high-impact facing

Dimensions

Standard Sizes: 2x2, 2x4, 4x4, 4x6, 4x8, custom sizes available up to 48x120

Fire Rating

ASTM E84 and UL 723 and CAN/ULC S102-M88
Meets NFPA 90A and 90B

Acoustic NRC

0.75 at 7/8 in. thickness, 0.85 at 1 in. thickness, 0.95 at 2 in. thickness

Application

Wall and ceiling panels

Material Notes

Acoustical fabrics from Guilford of Maine, or customize with printed designs

Edge Detail





Mounting Options

Adhesive, finish Nails, Z-clip attachments, impaling clips

Warranty


2-year warranty against workmanship and manufacturing defects


Diagram:

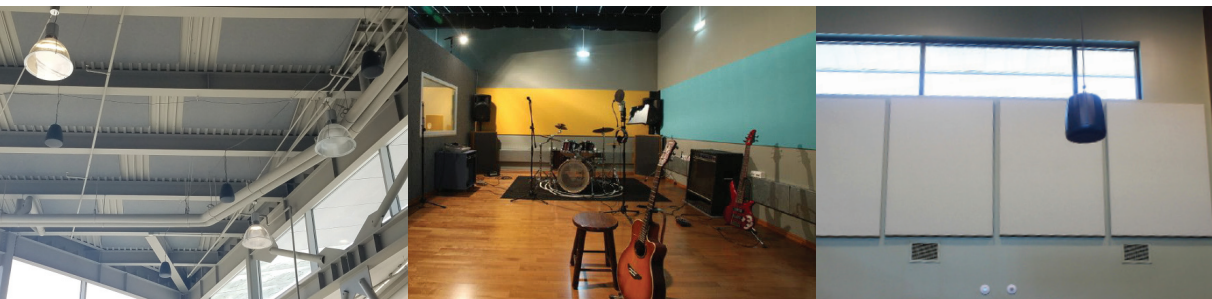

 www.j2systems.net

 sales@j2systems.net

 (801) 701-7979

 775 W Concord Park Dr.
Bluffdale, UT 84065