


J2 PET Felt Acoustic Drop-In Baffle Tile

PRODUCT DATA AND SPECIFICATIONS

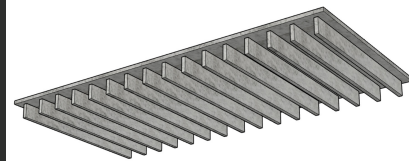

With J2 PET Felt Acoustic Drop-In Baffle Tiles, drop-in ceilings can make a bold aesthetic statement. Designed to fit into standard 2'x2' and 2'x4' ceiling grids, installation is simple and familiar. Our drop-in ceiling tiles are made from J2 PET Acoustic Felt, which is composed of >75% recycled material, so they are an eco-friendly choice. These tiles are available in 24 color options.

Style

Drop-in Ceiling Tile

Composition

100% PET (>75% recycled PET material)

Thickness

12mm

Density

1900g/sqm-2400g/sqm (approx 14pcf)

Dimensions

2x2: 23.69in x 23.69in x 2.5in, 2x4: 23.69in x 47.69in x 2.5in (custom blade heights are available)

Fire Rating

ASTM E84 - Class B (Class A panels available on request)

Acoustic NRC

All acoustic panel systems offer diverse sound absorption characteristics. Similar cloud systems have an NRC of between 0.65-0.90, however not all systems have been tested for NRC ratings.



Application

Drop-in or direct ceiling mount

Hardware and Installation


Tiles are provided in 2x2 or 2x4 formats, and can be placed in standard 9/16in and 15/16in t-grid ceilings. Ceiling grid hardware is not included. Some assembly of the individual ceiling tiles is required.


Product Diagram:

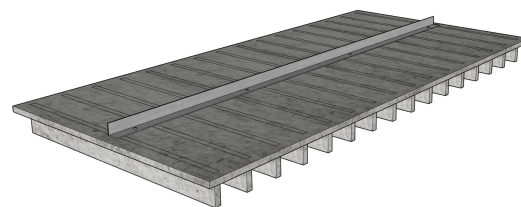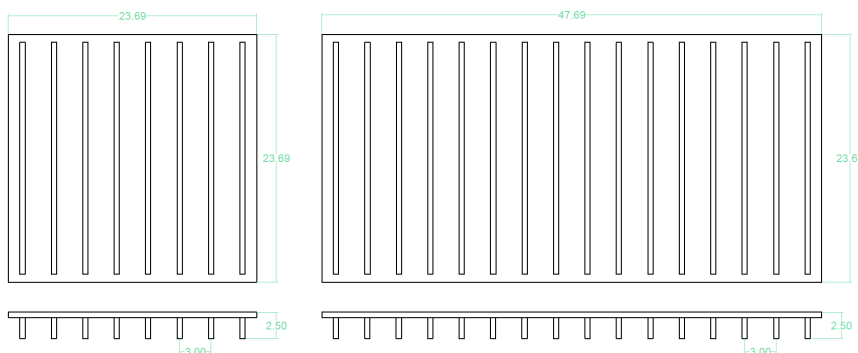

 www.j2systems.net

 sales@j2systems.net

 (801) 701-7979

 1750 S 500 W, Ste 300
Salt Lake City, UT 84115